





No.	Terminal Pin Name
1	RS0
2	R/W
3	E
4	DB0
...	...
11	DB7
12	GND
13	VDD
14	V0
15	F-GND

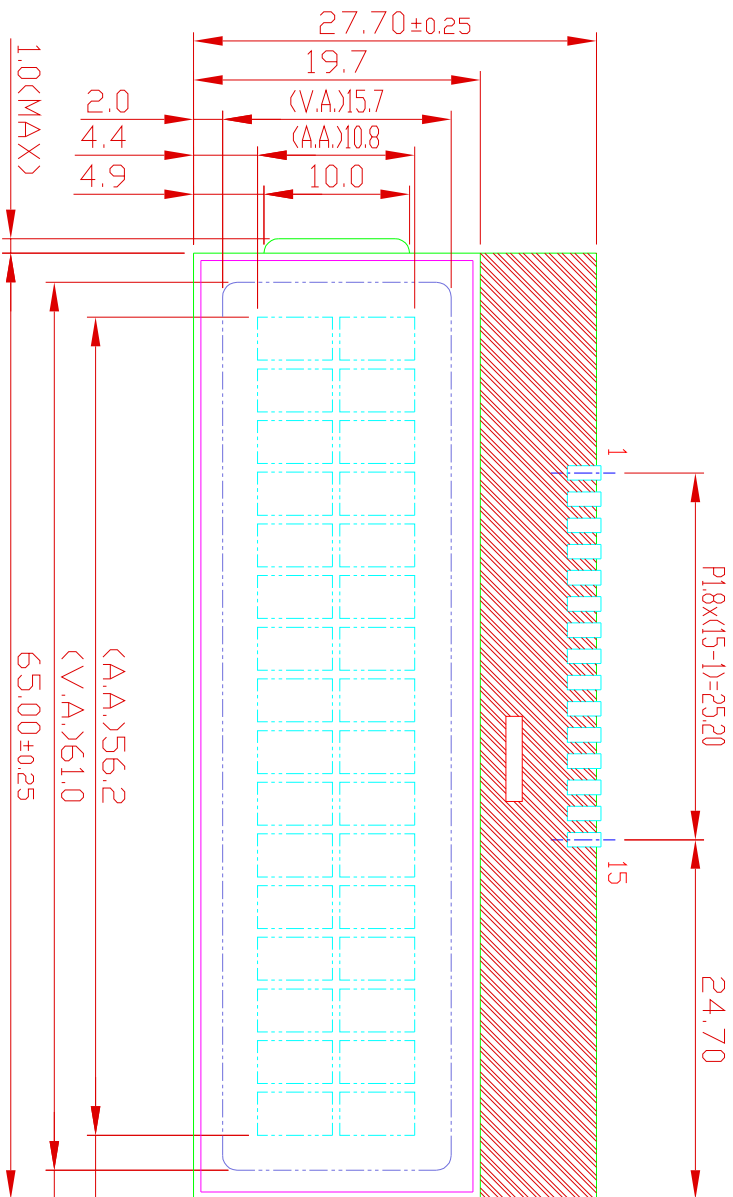

Pixels Details
Scale=6/1

Viewint Direction

- Note:
- *1. LCD Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/16; Bias : 1/4
 - *4. Operating Voltage : 5.0V, VLCD = 4.6V
 - *5. Operating Current : TBD
 - *6. Operating Temperature : -10°C~50°C
 - *7. Storage Temperature : -20°C~70°C
 - *8. Control/Drive IC : ST7032I
 - *9. Connector : CCG/PIN

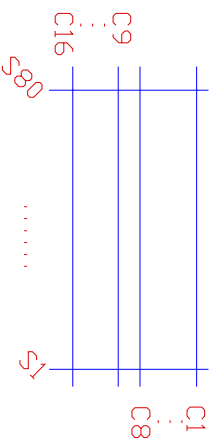

Panel Wiring Details
Scale=free

HOT DISPLAY

HTG1602D Outline Dwg

Dwg Title		Date	
HTG1602D Outline Dwg		2011-10-09	
Dwg No.	Unit	Tol.	Scale
1110091058	mm	±0.2	
Drawn	Checked	Approved	
Analyt			